
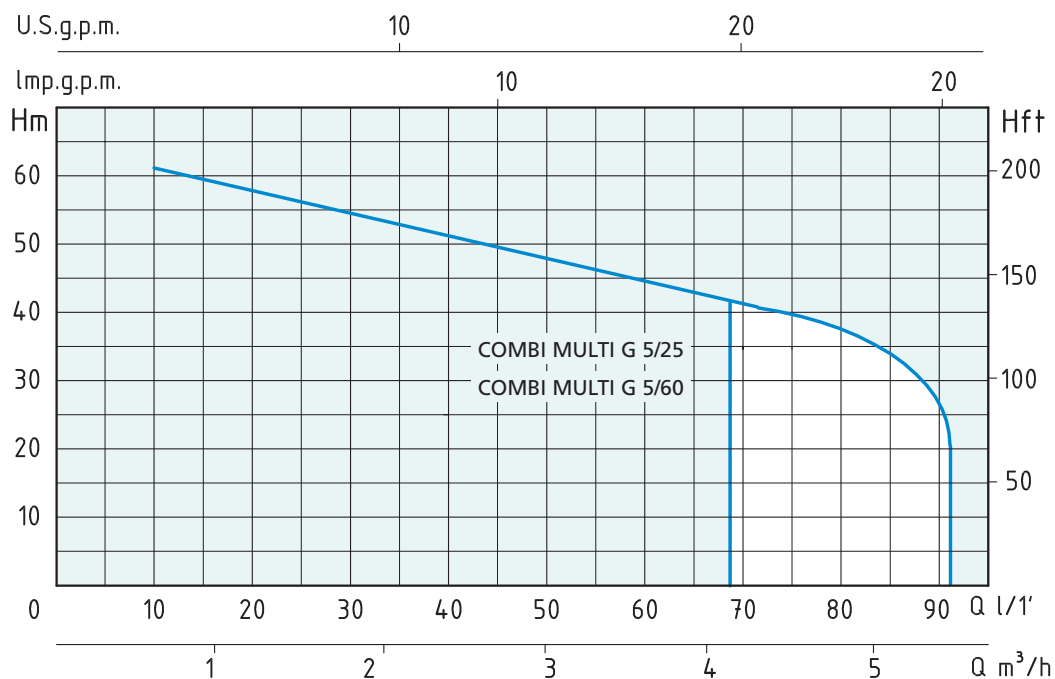


COMBI

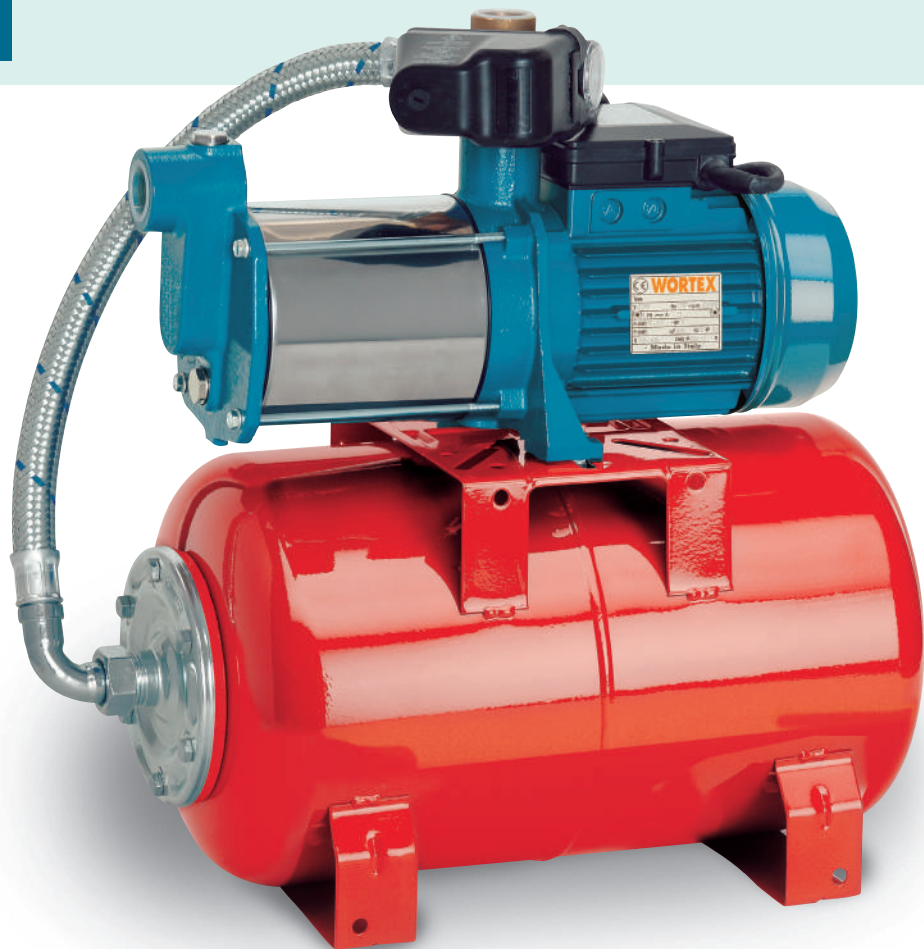

TIPO TYPE	POTENZA NOMINALE NOMINAL POWER		POTENZA ASSORBITA INPUT POWER	AMPERE	Pressostato pre-tarato Adjusted switch on/off pressure	Q = PORTATA - CAPACITY												
	P2		P1			m³/h	0,6	0,9	1,2	1,5	1,8	2,1	2,4	2,7	3	3,6		
Monofase Single-phase	HP	kW	kW	Monofase Sin gle- phase		lt/1'	10	15	20	25	30	35	40	45	50	60		
						Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.												
230V-50Hz				1 x 230V		Bar												
COMBI MULTI G 5/25	1,5	1,1	1,5	6,2		1,6 ÷ 3,2	H (m)	62	61	60	58	55	54	52	50	45	40	
COMBI MULTI G 5/60	1,5	1,1	1,5	6,2	1,6 ÷ 3,2	62		61	60	58	55	54	52	50	45	40		

APPLICAZIONI

Gruppi di pressurizzazione a funzionamento automatico realizzati con elettropompe jet autoadescanti.
Molto affidabili e silenziosi sono particolarmente adatti per aumentare la pressione disponibile da una rete di distribuzione, per l’approvvigionamento d’acqua con aspirazione da pozzi e per impianti idrici domestici.

LIMITI D’IMPIEGO

- Temperatura liquido fino a 35°C (per un uso domestico secondo EN 60335-2-41)
Temperatura max. liquido: 35°C (per altri impiegi)
- Temperatura ambiente fino a 40°C
- Altezza d’aspirazione manometrica fino a 8 mt.
- Servizio continuo

MOTORE

- Motore elettrico ad induzione a 2 poli (n = 2850 min⁻¹)
- Isolamento Classe F
- Protezione IP 44

MATERIALI

- Serbatoio a membrana butile
- Tubo flessibile raccordato
- Pressostato pre-tarato 1,6÷3,2 bar con cavi
- Manometro
- Raccordo ottone

APPLICATION

Automatic high pressure groups coupled with selfpriming jet pumps.
They are very silent and reliable and particularly suitable to increase pressure from a water system, to supply water from wells and in domestic high pressure groups.

OPERATING CONDITIONS


- Liquid temperature up to 35°C (for home use according to EN 60335-2-41)
Temperature max. liquid: 35°C (for other uses)
- Ambient temperature up to 40°C
- Total suction lift up to 8 mt.
- Continuous duty

MOTOR

- Two-Pole induction motor (n = 2850 min⁻¹)
- Insulation Class F
- Protection IP 44

MATERIALS

- Butyl membrane tank
- Flexible hose with connection
- Adjusted switch on/off pressure 1,6÷3,2 bar with cable
- Pressure gauge
- Brass connection

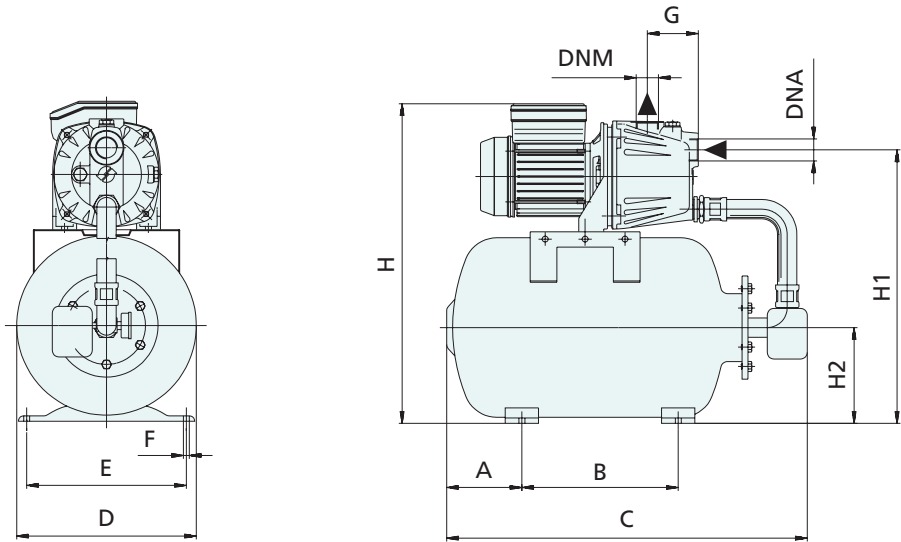

TIPO TYPE	DIMENSIONI mm - DIMENSIONS mm												DIMENSIONI DIMENSIONS mm			PESO WEIGHT
	A	B	C	D	E	F	G	H	H1	H2	DNA	DNM	P	L		
Monofase Single-phase	A	B	C	D	E	F	G	H	H1	H2	DNA	DNM	P	L	H	Kg
COMBI MULTI G 5/25	113	235	530	270	240	9	81	575	437	144	1"	1"	285	550	630	21,2
COMBI MULTI G 5/60	173	295	748	380	305	11	171	698	603	215	1"¼	1"	400	775	730	44,6