


SVS-VA

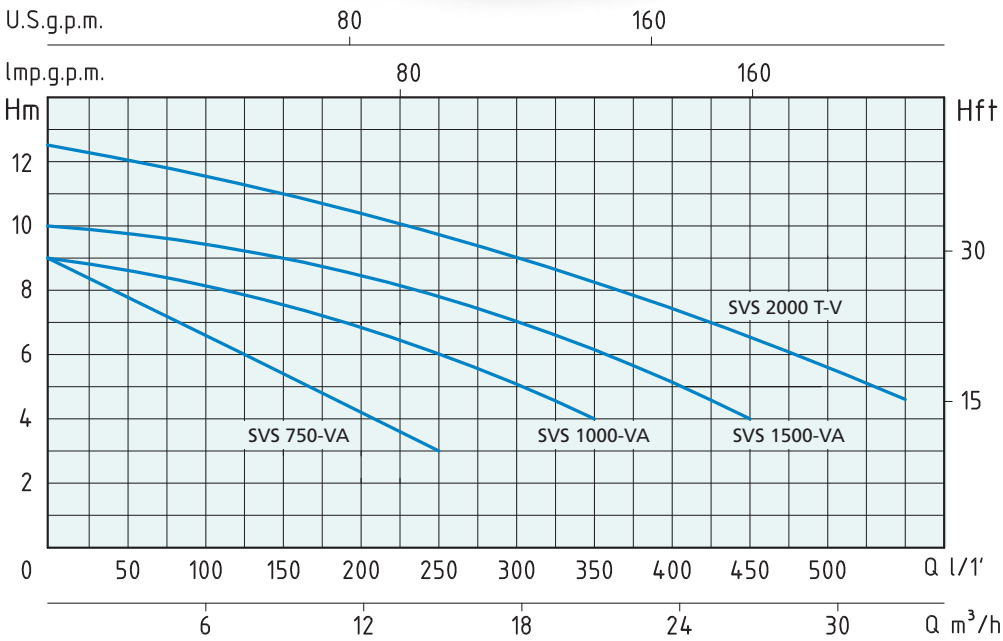

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		POTENZA ASSORBITA INPUT POWER	AMPERE		Q = PORTATA - CAPACITY										
Monofase Single-phase	Trifase Three-phase	P2		P1	Monofase Single-phase	Trifase Three-phase											
		HP	KW	KW			m³/h	0	3,6	5,4	7,2	9	12	15	21	27	33
230V-50Hz	400V-50Hz				1 x 230V	3 x 400V	lt/1'	0	60	90	120	150	200	250	350	450	550
SVS 750-VA		0,75	0,55	0,9	4		Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
SVS 1000-VA		1	0,75	1,1	4,8		H (m)	9	8	7	6	5	4	3			
SVS 1500-VA		1,5	1,1	1,4	6,1			9	8,3	8	7,8	7,5	7	6	4		
	SVS 2000 T-V	2	1,5	1,75		3,2		10	9,7	9,5	9,3	9	8,5	8	6	4	
								12,5	12	11,7	11,3	11	10,5	9,8	8,3	6,5	5

ELETTROPOMPE SOMMERSE INOX PER ACQUE CARICHE STAINLESS STEEL SUBMERSIBLE PUMPS FOR DIRTY WATER

WORTEX

APPLICAZIONI

Elettropompe sommersa inox per drenaggio con girante in acciaio inox adatte per svuotamento di fosse di decantazione e per pompaggio di acque luride ad uso domestico e civile.

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C (per un uso domestico secondo EN 60335-2-41)
- Temperatura max. liquido: 35°C (per altri impiegi)
- Massima profondità d'immersione 5 mt.
- Passaggio solidi Ø 35 mm (SXS 750/V)
- Passaggio solidi Ø 50 mm
- Livello min. d'aspirazione 120 mm
- Servizio continuo

MOTORE

- Tenuta meccanica in bagno d'olio
- Condensatore permanente inserito
- Monofase V230-50Hz automatico (con galleggiante)
- Trifase V400-50Hz manuale
- Isolamento Classe F
- Protezione IP 68

MATERIALI

- Maniglia
 - Cassa motore
 - Corpo pompa
 - Girante
 - Flangia aspirazione
 - Albero motore
 - Tenuta meccanica in camera d'olio
- Acciaio Inox AISI 304+Nylon
Acciaio Inox AISI 304
Acciaio Inox AISI 304
Acciaio Inox AISI 304
Acciaio Inox AISI 304
Acciaio Inox AISI 304
Silicio/Silicio/NBR

APPLICATION

Drainage submersible stainless steel water pumps with stainless steel impeller.
Able to drain decanting cesspools and to pump waste water for domestic and civil purposes.

OPERATING CONDITIONS



- Liquid temperature up to 35°C (for home use according to EN 60335-2-41)
- Temperature max. liquid: 35°C (for other uses)
- Maximum immersion depth 5 mt.
- Grain size inlet Ø 35 mm (SXS 750/V)
- Grain size inlet Ø 50 mm
- Min. suction level 120 mm
- Continuous duty

MOTOR

- Mechanical seal in oil bath
- Permanent split capacitor
- Singlephase V230-50Hz automatic (with floaters)
- Threephase V400-50Hz manual
- Insulation Class F
- Protection IP 68

MATERIALS

- Handle
 - Motor casing
 - Pump body
 - Impeller
 - Suction flange
 - Shaft with rotor
 - Mechanical seal in oil chamber
- Stainless Steel AISI 304+Nylon
Stainless Steel AISI 304
Stainless Steel AISI 304
Stainless Steel AISI 304
Stainless Steel AISI 304
Stainless Steel AISI 304
Silicon/Silicon/NBR

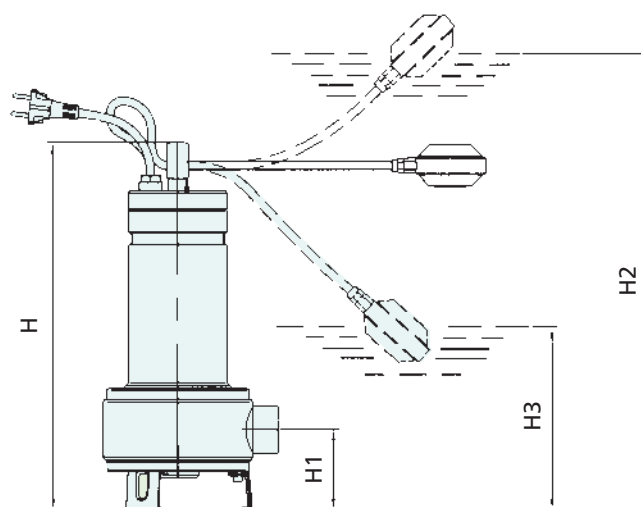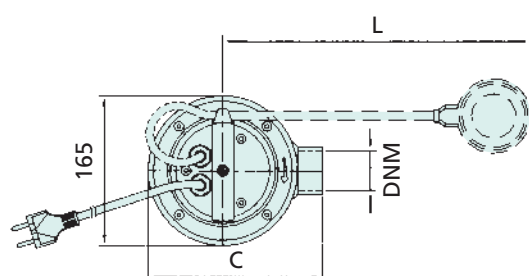

TIPO TYPE		DIMENSIONI mm - DIMENSIONS mm								DIMENSIONI DIMENSIONS mm			PESO WEIGHT
Monofase Single-phase	Trifase Three-phase	H	H1	H2	H3	L	C	DNM	CAVO CABLE	P	L	H	Kg
SVS 750-VA		403	88	483	185	350	193	1" 1/2	10 mt H07RNF	205	228	534	10,8
SVS 1000-VA		486	111,5	566	268	350	198	2"	10 mt H07RNF	205	228	534	12,9
SVS 1500-VA		486	111,5	566	268	350	198	2"	10 mt H07RNF	205	228	534	14,3
	SVS 2000 T-V	486	111,5	-	-	-	198	2"	10 mt H07RNF	205	228	534	14,6