
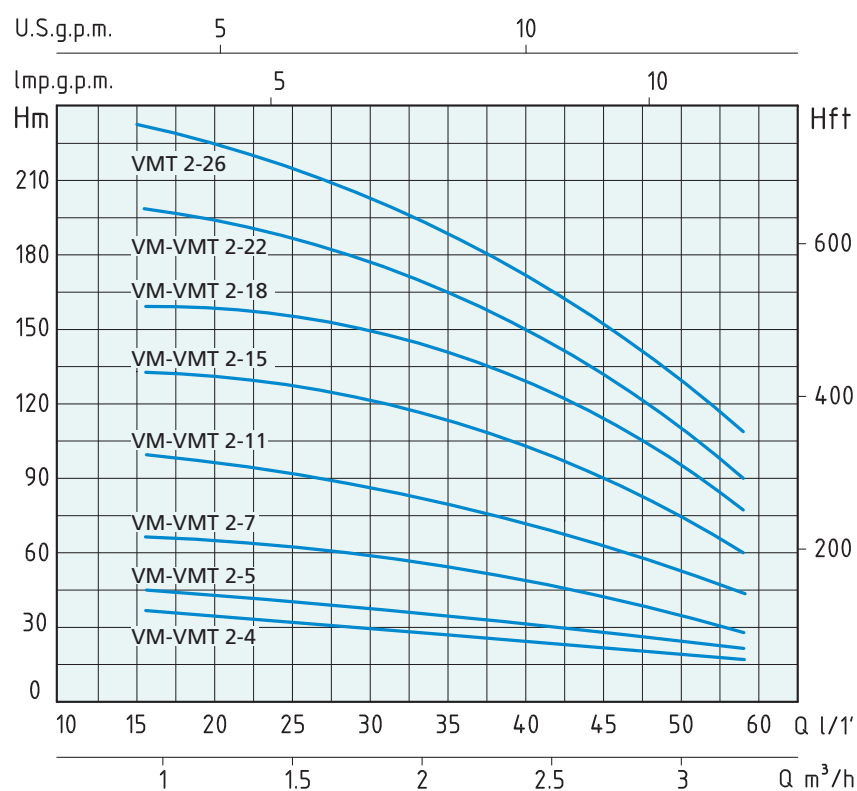


VM 2

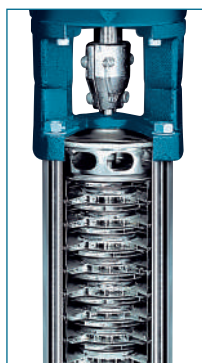

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		AMPERE		Q = PORTATA - CAPACITY										
Monofase Single-phase	Trifase Three-phase	P2		Monofase Single-phase	Trifase Three-phase	m³/h	1	1,2	1,5	1,6	2	2,4	2,8	3	3,2	3,5
		HP	kW			lt/1'	16	20	25	26	33	40	46	50	53	58
230V-50Hz	230/400V-50Hz			1 x 230V	3 x 400V	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
VM 2-4	VMT 2-4	0,75	0,55	3,4	1,4	H (m)	36	34	32,5	32	29	26,5	23,5	21,5	20	16
VM 2-5	VMT 2-5	0,75	0,55	3,4	1,4		45	43	40,5	40	37	33	30	26	23,5	20
VM 2-7	VMT 2-7	1	0,75	5	1,7		63	60	57,5	57	52	47	42	38	35	28
VM 2-11	VMT 2-11	1,5	1,1	6,9	2,5		98	94	89,5	89	80	73	64	58	53	44
VM 2-15	VMT 2-15	2	1,5	9,7	3,5		134	130	124,5	124	114	104	94	86	78	60
VM 2-18	VMT 2-18	3	2,2	13,5	4,7		161	157	150,5	150	140	129	118	104	93	76
VM 2-22	VMT 2-22	3	2,2	13,5	4,7		197	191	180,5	180	165	150	135	123	110	90
	VMT 2-26	4	3		6,1		232	224	214,5	214	190	175	158	144	130	110

ELETTROPOMPE VERTICALI MULTISTADIO ACCIAIO INOX VERTICAL MULTISTAGE STAINLESS STEEL PUMPS

WORTEX

APPLICAZIONI

Elettropompe universali per applicazioni civili ed industriali, per impianti di lavaggio ad alta pressione, per l'irrigazione, l'agricoltura, impianti sportivi, per fontane e per movimentazione di liquidi moderatamente aggressivi privi di sostanze solide o abrasive.

APPLICATION

Universal pumps for domestic or municipal water supply systems, for clean non-explosive liquids without solid or abrasive substances, for agricultural irrigation and sports application, for civil and industrial use, boiler feeding and condensate systems and for high pressure washing plants.

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C (per un uso domestico secondo EN 60335-2-41)
- Temperatura max. liquido: 110°C (per altri impieghi)
- Temperatura ambiente fino a 40° C

MOTORE

- Motore elettrico ad induzione a 2 poli (n = 2900 min⁻¹)
- Isolamento Classe F
- Protezione IP 55

MATERIALI

- Corpo aspirazione Acciaio Inox AISI 304
- Corpo mandata Acciaio Inox AISI 304
- Girante Acciaio Inox AISI 304
- Camicia pompa Acciaio Inox AISI 304
- Coperchio superiore Acciaio Inox AISI 304
- Coperchio inferiore Acciaio Inox AISI 304
- Albero motore Acciaio Inox AISI 304
- Tenute meccaniche Silicio/Silicio/Viton

OPERATING CONDITIONS


- Liquid temperature up to 35°C (for home use according to EN 60335-2-41)
- Temperature max. liquid: 110°C (for other uses)
- Ambient temperature max to 40°C

MOTOR


- Two-pole electric standard motor (n = 2900 min⁻¹)
- Insulation Class F
- Protection IP 55

MATERIALS

- Suction casing Stainless Steel AISI 304
- Delivery casing Stainless Steel AISI 304
- Impeller Stainless Steel AISI 304
- External jacket Stainless Steel AISI 304
- Upper cover Stainless Steel AISI 304
- Lower cover Stainless Steel AISI 304
- Pump shaft Stainless Steel AISI 304
- Mechanical seal Silicon/Silicon/Viton

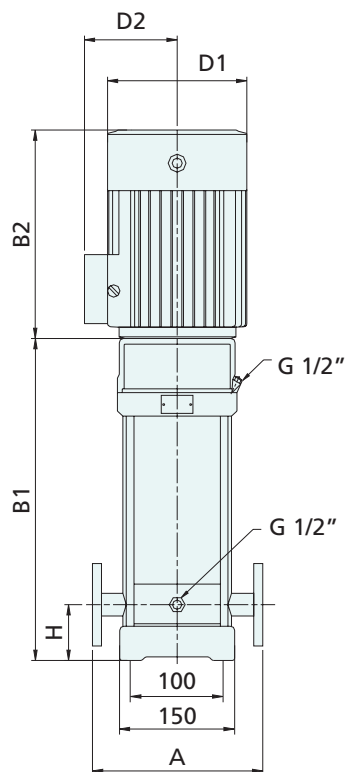

DN 32 1" 1/4

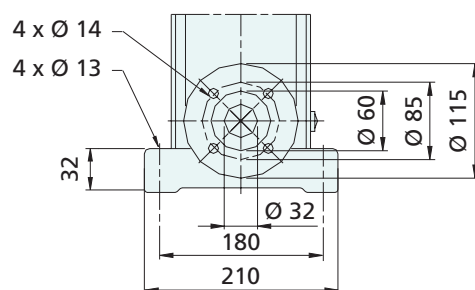

TIPO TYPE		DIMENSIONI mm - DIMENSIONS mm								DIMENSIONI DIMENSIONS mm			PESO WEIGHT
Monofase Single-phase	Trifase Three-phase	A	H	B1	B2	B1 + B2	D1	D2	FLANGIA FLANGE	P	L	H	Kg
VM 2-4	VMT 2-4	250	75	294	210	504	148	117	DN 32 1" 1/4	320	765	395	34
VM 2-5	VMT 2-5	250	75	312	210	522	148	117	DN 32 1" 1/4	320	765	395	34,1
VM 2-7	VMT 2-7	250	75	358	245	603	170	142	DN 32 1" 1/4	320	765	395	38,1
VM 2-11	VMT 2-11	250	75	430	245	675	170	142	DN 32 1" 1/4	320	765	395	42,1
VM 2-15	VMT 2-15	250	75	512	290	802	190	155	DN 32 1" 1/4	372	965	445	50,9
VM 2-18	VMT 2-18	250	75	566	290	856	190	155	DN 32 1" 1/4	372	965	445	55
VM 2-22	VMT 2-22	250	75	638	290	928	190	155	DN 32 1" 1/4	365	1115	440	59,4
	VMT 2-26	250	75	720	315	1035	197	165	DN 32 1" 1/4	365	1115	440	66,1